


Features

- Glass Passivated Die Construction
- Super-Fast Switching
- Low Forward Voltage Drop
- Low Reverse Leakage Current
- High Surge Current Capability
- Plastic Material has UL Flammability Classification 94V-0

TO-252(DPAK)

Mechanical Data

- Case: TO-252(DPAK), Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram
- Weight: 2.24 grams (approx.)
- Mounting Position: Any
- **Lead Free: For RoHS / Lead Free Version**

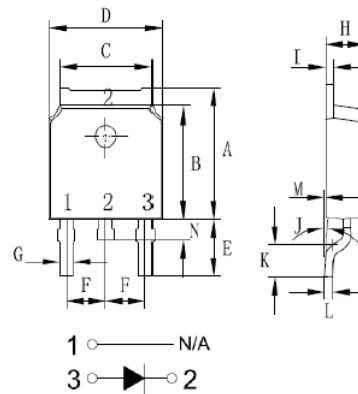

TO-252 (DPAK)		
Unit:mm		
DIM	MIN	MAX
A	6.85	7.25
B	5.90	6.30
C	5.13	5.53
D	6.40	6.80
E	2.90	3.30
F	2.19	2.39
G	0.45	0.85
H	2.20	2.40
I	0.41	0.61
J	0°	8°
K	1.45	1.85
L	0.41	0.61
M	0.00	0.12
N	0.60	1.00

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	SFD 810	SFD 820	SFD 830	SFD 840	SFD 850	SFD 860	Unit
Peak Repetitive Reverse Voltage	V _{RRM}							V
Working Peak Reverse Voltage	V _{RWM}	100	200	300	400	500	600	
DC Blocking Voltage	V _R							
RMS Reverse Voltage	V _{R(RMS)}	70	140	210	280	350	420	V
Average Rectified Output Current @T _C = 100°C	I _O	8.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	90						A
Forward Voltage @I _F = 8.0A	V _{FM}	1.0	1.3		1.7			V
Peak Reverse Current @T _A = 25°C	I _{RM}	10						μA
At Rated DC Blocking Voltage @T _A = 100°C		400						
Reverse Recovery Time (Note 1)	t _{rr}	35						nS
Typical Junction Capacitance (Note 2)	C _j	80				50		pF
Operating and Storage Temperature Range	T _j , T _{STG}	-55 to +150						°C

Note: 1. Measured with I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

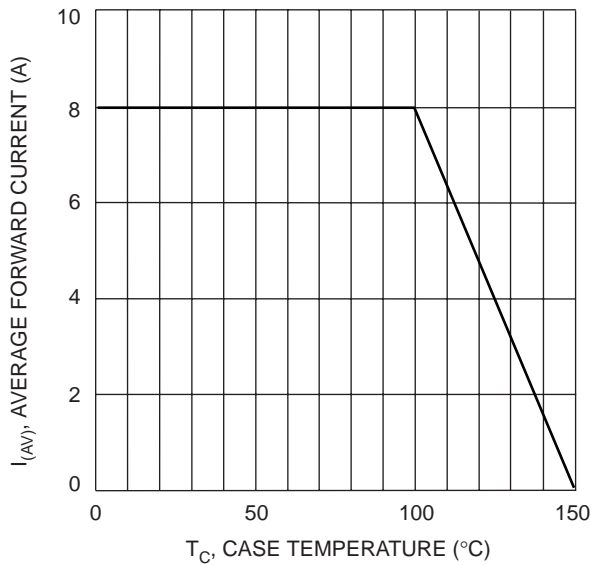


Fig. 1 Forward Current Derating Curve

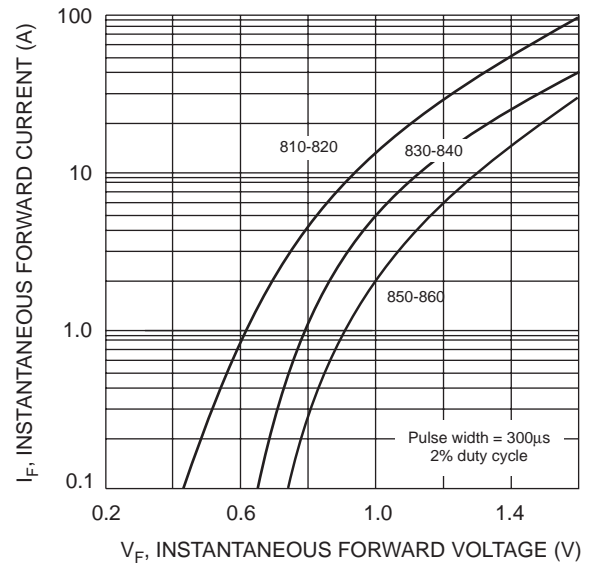


Fig. 2 Typical Forward Characteristics

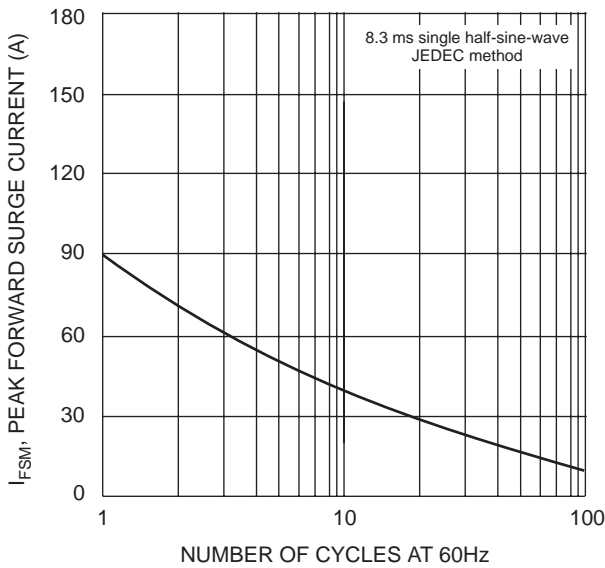


Fig. 3 Max Non-Repetitive Surge Current

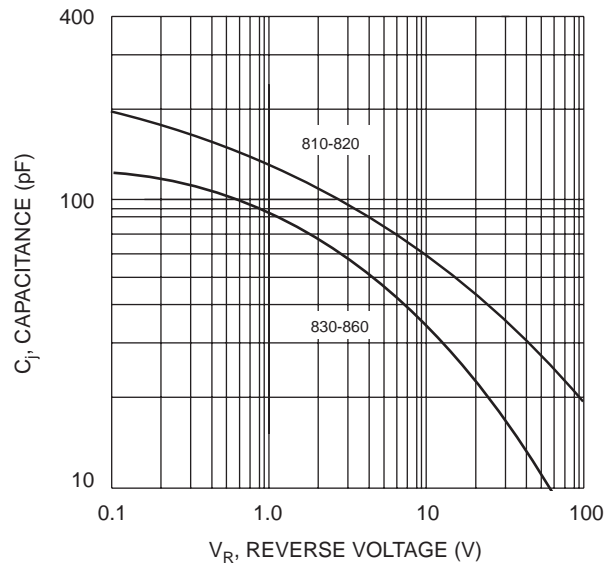


Fig. 4 Typical Junction Capacitance